

# 2020 TUNDRA LT

## PACKAGE HIGHLIGHTS

- Running boards with large openings
- REV-XU™ platform
- SC™-5U articulating rear suspension with locking mechanism on one side (no tool required)
- 406 x 3,923 x 38.1 mm (16 x 154 x 1.5 in.) Charger track
- Lynx Telescopic front suspension
- Pilot™ DS 2 skis
- Brembo brake with braided stainless-steel brake line
- Analog gauge with display
- Electric start
- HPG™ rear shock
- Low oil light
- Rack & Hitch

## EXTRA HIGHLIGHTS

- 600 ACE™
- iTC™ Engine mapping modes (Standard, Sport or ECO®)
- Reversible throttle lever (thumb or finger activated)
- Extended heat exchanger for better cooling capacity
- Engine oil cooler
- RF D.E.S.S.™ key
- Air radiator with fan



TUNDRA™ LT 600 ACE™ shown

## ROTAX® ENGINE

	600 ACE™
Engine details	Liquid-cooled, four-stroke D.O.H.C., dry sump
Cylinders	2
Displacement	600 cc
Bore	74 mm
Stroke	69.7 mm
Maximum engine speed	7,250 RPM
Carburation	EFI
Recommended fuel type	Unleaded
Minimum octane	95
Fuel tank	40 L
Oil tank capacity	2.1 L

## POWERTRAIN

Drive clutch type	eDrive™ 2
Driven clutch type	QRS (short shaft)
Engagement	2,200 RPM
Small sprocket number of teeth	21
Large sprocket number of teeth	51
Drive sprocket number of teeth	7
Drive sprocket diameter	183 mm
Brake system	Brembo brake with braided stainless-steel brake line

## FEATURES

Frame	REV-XU™	Starter	Electric	Mirrors	Optional
Skis	Pilot™ DS 2	Reverse	Mechanical	Windshield	<b>394 mm</b>
Seating	Low profile 2-up	Heated throttle lever	Standard	Runner	Square 3/8
Handlebar	Straight aluminum with J-hooks / Grab handle	Heated grips	Standard	Carbide configuration	102 mm at 90°
Riser block height	205 mm	Gauge	Analog with display	Hitch	Tongue Type

## COLOR

Sunburst Yellow 

## DIMENSIONS

Vehicle overall length	3,247 mm
Vehicle overall width	1,002 mm
Vehicle overall height	1,325 mm
Ski stance	813 mm
Ski overall length	1,049 mm
Track nominal width	406 mm
Track nominal length	3,923 mm
Track profile height	38.1 mm Charger

## SUSPENSION

Front suspension	LTS
Front shock	Motion Control
Front suspension max. travel	150 mm
Rear suspension	SC™-5U
Center shock	Motion Control
Rear shock	HPG™
Rear suspension max. travel	239 mm



TUNDRA™ LT 600 ACE™ shown



TUNDRA™ LT 600 ACE™ shown

**FEATURE HIGHLIGHTS**




**Low profile 2-up seat**

Capable of seating two riders for trip up the mountain, yet low profile for clearance when boondocking solo.



**Finger throttle position**

Throttle block can be rotated to be used as either a traditional thumb throttle or unique finger throttle.

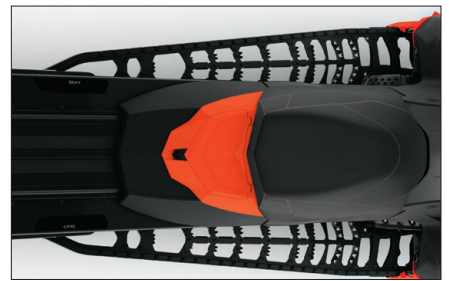


**Running boards with large openings**

Massive, strategically shaped openings keep the boards clear. A tall extruded edge adds stiffness and has aggressive boot grips.



**Lightweight aluminum rack**

23 kg cargo capacity.

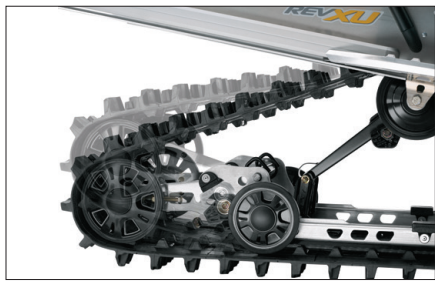

**SC™-5U articulating rear suspension**

Features settings that maximize deep snow traction in reverse or lock out for towing.

**GAUGE FEATURES**

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Engine temperature	Optional (600 ACE™), N/A (550 Fan)